specifications

OD1100-2

SKOPE Refrigeration

SKOPE Open Deck Chiller (CAREL ir33)
Type: O11RV

CABINET DIMENSIONS

	External	Internal
Height:	2015-2195mm*	1375mm
Width:	1285mm	1180mm
Depth:	830mm	545mm
Floor area:	1.05m^2	

* Total height with standard 155mm sign is 2015mm.
Total height with optional 335mm high sign is 2195mm.

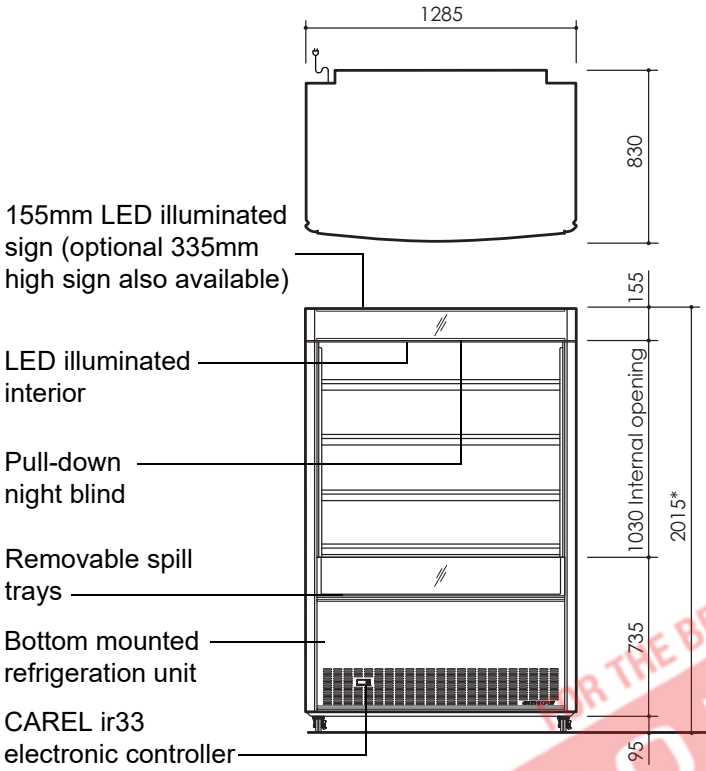

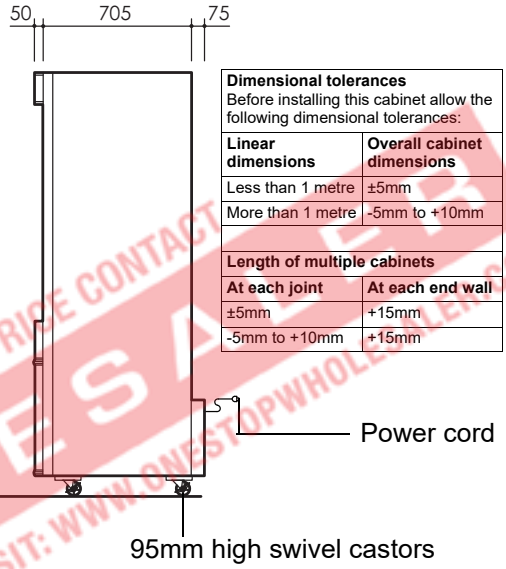

Dimensional tolerances Before installing this cabinet allow the following dimensional tolerances:	
Linear dimensions	**Overall cabinet dimensions**
Less than 1 metre	±5mm
More than 1 metre	-5mm to +10mm
Length of multiple cabinets	
At each joint	**At each end wall**
±5mm	+15mm
-5mm to +10mm	+15mm

Copyright © 2017 SKOPE Industries Limited

CABINET SPECIFICATIONS

Refrigeration system:	Bottom mount removable refrigeration unit with electronic controller (UB80AFD)
Electronic controller:	CAREL ir33 electronic controller
Refrigerant:	R452A / 1100g
Nominal compressor capacity:	2090 Watts
Cabinet internal volume:	1020 litres
Insulation:	50mm thick, high density cyclo-isopentane polyurethane foam
Operating temperature:	0°C to +5°C
Electrical:	230-240 Volts a.c. 50 Hz, Chiller: 5.8 Amps
Internal lighting:	1 x horizontal top light: 24W T7 LED tube (1150mm)
Sign lighting:	1 x horizontal sign light: 20W T7 LED tube (1150mm)
Power cord:	2.5m flexible power cord with 3-pin plug
Doors:	n.a.
Internal opening size:	1140mm wide x 1030mm high
Shelves:	4 x adjustable height, angled shelves (2 shelves 1150mm x 350mm and 2 shelves 1150mm x 390mm) and 1 x fixed in place, angled bottom tray (1150mm x 400mm).
Weight:	282 kg

SKOPE Industries Limited reserve the right to alter specifications without notice.

PSS0507 Rev. 1.1 Nov. 2019

FOR THE BEST PRICE CONTACT WHOLESALER
PHONE: 1300 131 700
VISIT: WWW.ONESTOPWHOLESALER.COM

SKOPE INDUSTRIES LIMITED
New Zealand Freephone: 0800 947 5673, Fax: (03) 983 3896. Australian Freephone: 1800 121 535, Freefax: 1800 121 533
Email: enquiry@skope.co.nz Website: www.skope.co.nz